


LIMIT UNLESS OTHERWISE NOTED FRACT.±1/16" DEC.DIM.±.010 ANGULAR±1°

THE DRAWING IS LOANED WITH THE EXPRESSED AGREEMENT THAT THE DRAWING AND INFORMATION THEREIN CONTAINED ARE THE PROPERTY OF ELECTRIC POWER DOOR AND WILL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART NOR USED FOR THE FABRICATION OR CONSTRUCTION OF MATERIALS EXCEPT UPON THE WRITTEN PERMISSION OF ELECTRIC POWER DOOR FIRST OBTAINED AND SPECIFIC AS TO USE. THE ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS THE ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS THE ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS THE ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS

THIS DRAWING CONTAINS FIELD INSTALLED PARTS & INSTALLATION DETAILS

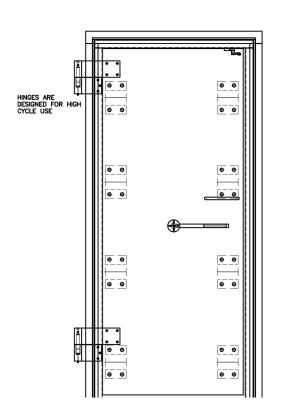

NON-THREAT SIDE

THREAT SIDE

-CLEAR OPENING -PANEL WIDTH -EMBED OPENING-

> PULL FANDLE ... INT AND EXT EMBED OPENING PANEL HANDLE ROTATED FOR CLARITY CLEAR

- NOTE:

 1. ALL STEEL SURFACES CAN BE PRIMED OR PRIMED AND FINISH PAINTED PER THE CUSTOMER SPECS.

 2. LOCATION, MOUNTING, AND FIELD WIRING OF ALL ELECTRICAL CONTROLS, INCLUDING THE SUPPLY AND INSTALLATION OF ALL NECESSARY CONDUIT AND JUNCTION BOXES IS NOT BY ELECTRIC POWER DOOR.

 3. DOORS ARE FLAT SHEETED.

 4. LATCHING PINS ARE SIZED DEPENDING ON THE BLAST LOADING OF THE DOOR.

 5. PLATE THICKNESS IS SIZED TO BLAST LOADING, OTHER OPTIONS ARE AVAILABLE.

 6. BLAST DOOR CAN BE POWER OPERATED

EXTERIOR ELEVATION THREAT SIDE