
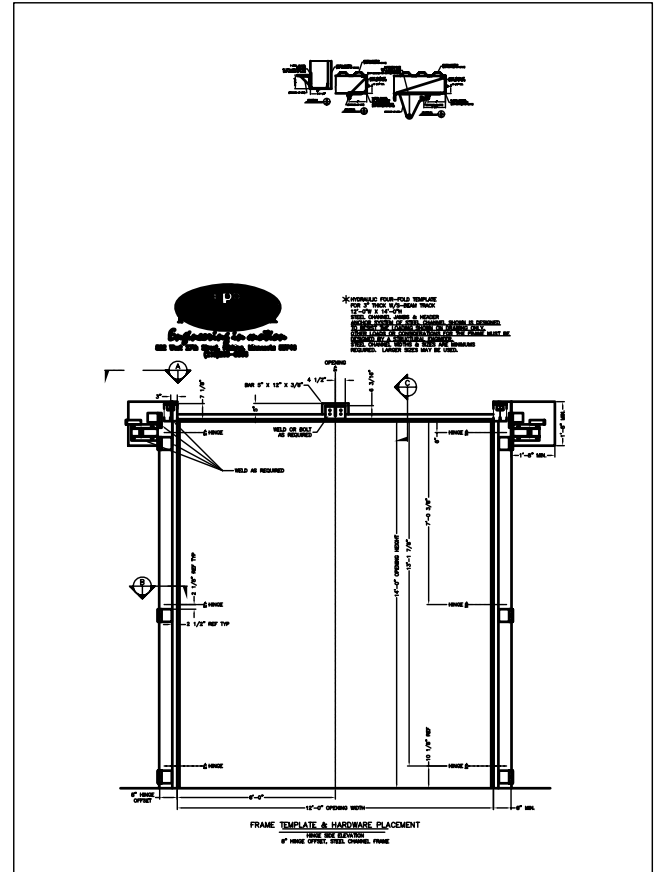


HYDRAULIC FOUR-FOLD TEMPLATES
FOR 3" THICK DOOR PANELS
& S-BEAM GUIDE TRACK



3" THICK
PANELS

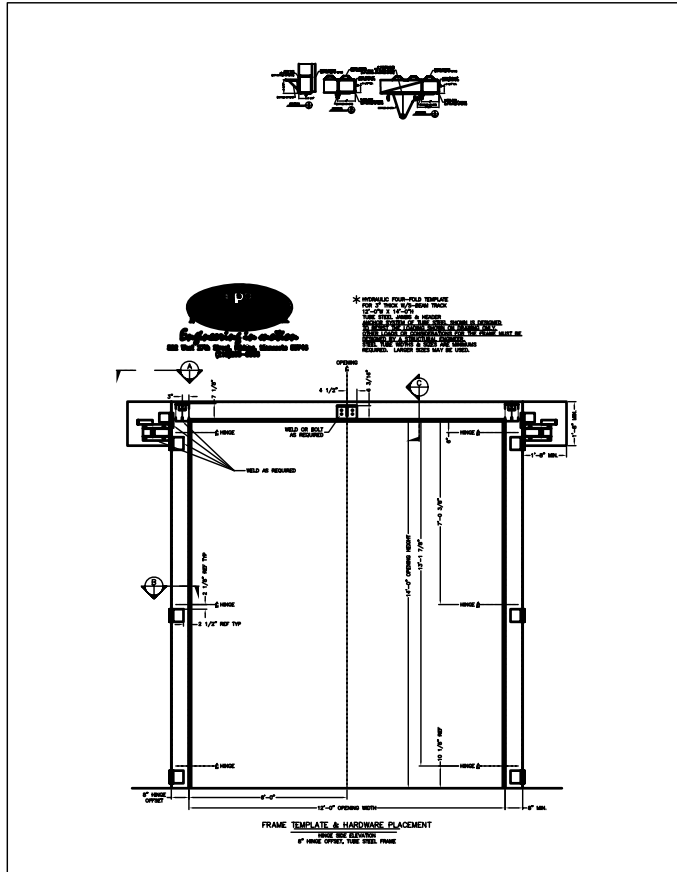


TUBE JAMB

CHANNEL JAMB

2" THICK
PANELS

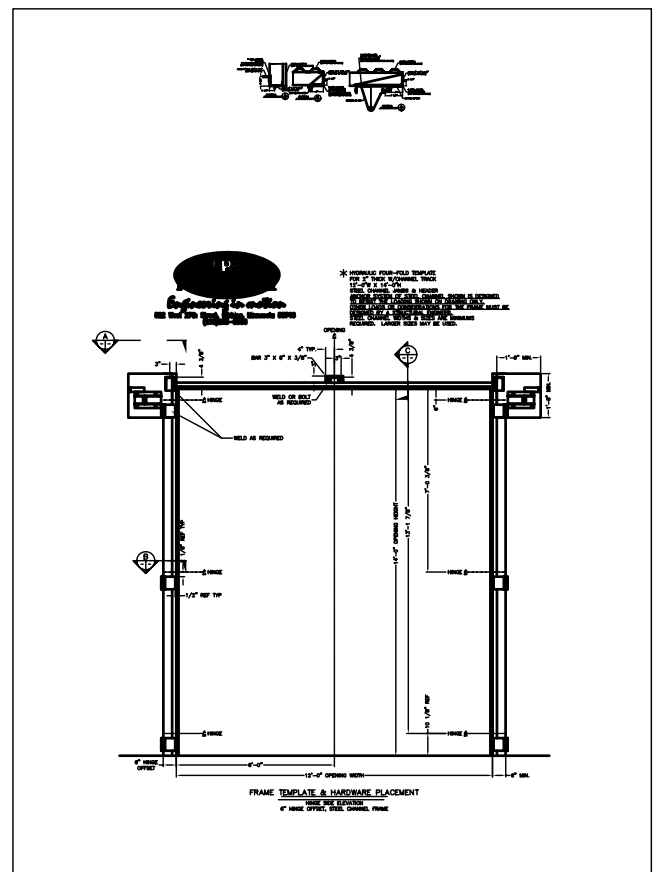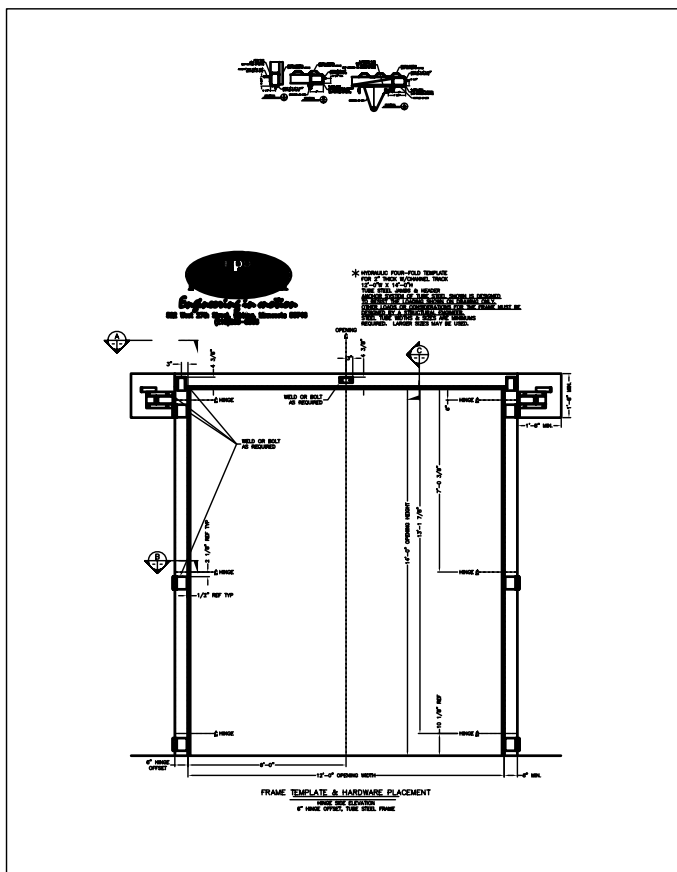


HYDRAULIC FOUR-FOLD TEMPLATES
FOR 2" THICK DOOR PANELS
& CHANNEL STYLE GUIDE TRACK

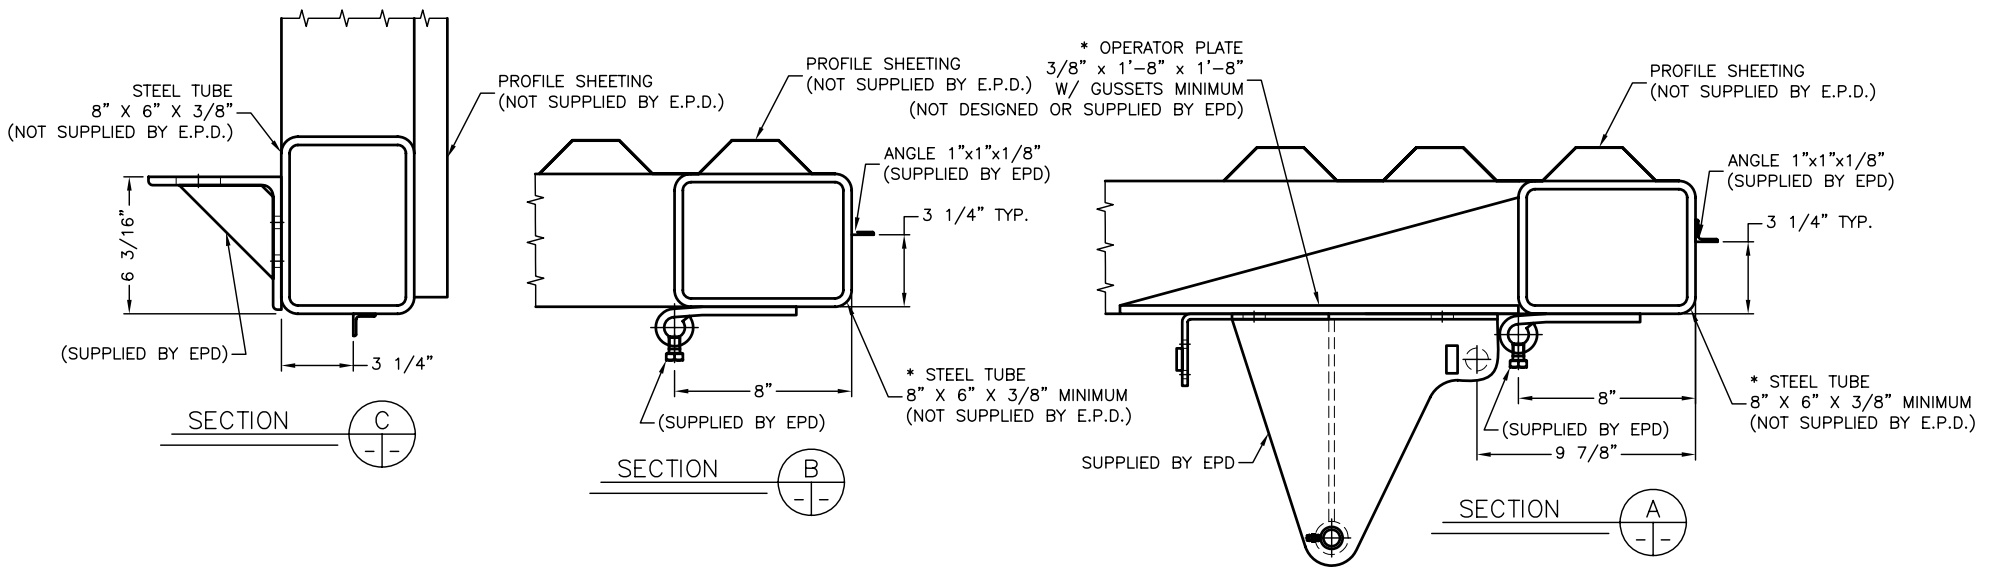

Engineering in motion

522 West 27th Street, Hibbing, Minnesota 55746
(218)263-8366

* HYDRAULIC FOUR-FOLD TEMPLATE
FOR 3" THICK W/S-BEAM TRACK
12'-0"W X 14'-0"H
TUBE STEEL JAMBS & HEADER
ANCHOR SYSTEM OF TUBE STEEL SHOWN IS DESIGNED
TO RESIST THE LOADING SHOWN ON DRAWING ONLY.
OTHER LOADS OR CONSIDERATIONS FOR THE FRAME MUST BE
DESIGNED BY A STRUCTURAL ENGINEER.
STEEL TUBE WIDTHS & SIZES ARE MINIMUMS
REQUIRED. LARGER SIZES MAY BE USED.

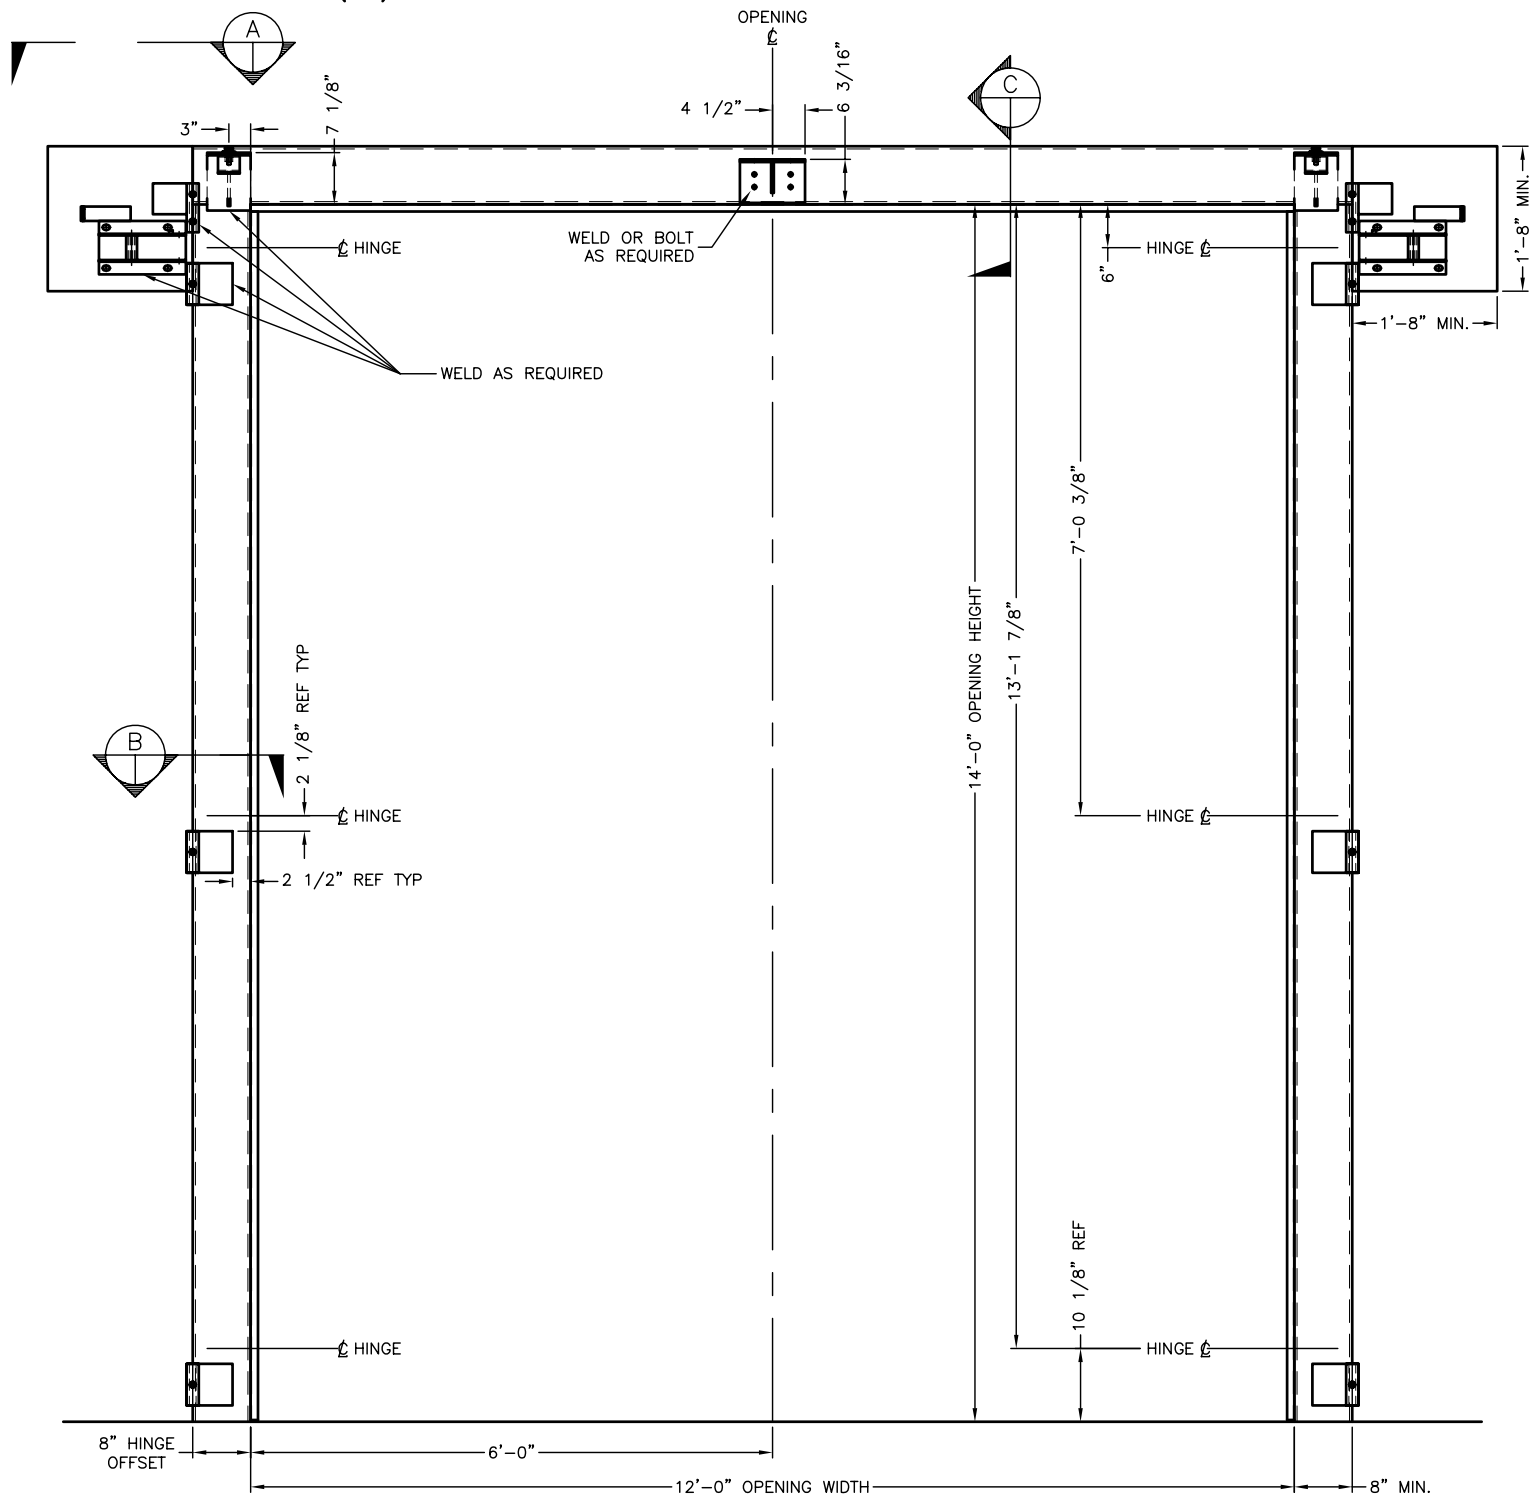

FRAME TEMPLATE & HARDWARE PLACEMENT

HINGE SIDE ELEVATION
8" HINGE OFFSET, TUBE STEEL FRAME

