



**ELECTRIC
POWER DOOR**




GRAIN INDUSTRY DOORS

DESIGNED TO LAST A LIFETIME

Control Dust and Contaminants When Loading and Offloading Grain

Designed for both truck and rail loading areas and engineered to be opened and closed hundreds of times daily. EPD four fold doors operate up to two feet per second. Horizontal movement keeps the doors always in the driver's view, reducing the chance of hitting the door. Doors can be mounted on the interior or exterior of the wall. Hydraulic four fold doors will operate more than a million cycles under normal operating conditions without requiring operator replacement. Hinged door panels – no chains, spring counterbalances, garage door rollers or side guides to maintain. EPD doors are abuse resistant and are a minimum 2-inch thick door constructed of structural steel and heavy 14-gauge sheeting. In most instances they will still operate after being hit or buffeted by high wind loads. Energy tested doors are customized to fit tight to openings – holds down costs of heating and cooling. Energy results are available by contacting EPD sales engineer. Wind and weather resistant doors operate in toughest conditions. Doors handle high wind loads and can be insulated to reduce icing in extreme cold temperatures.

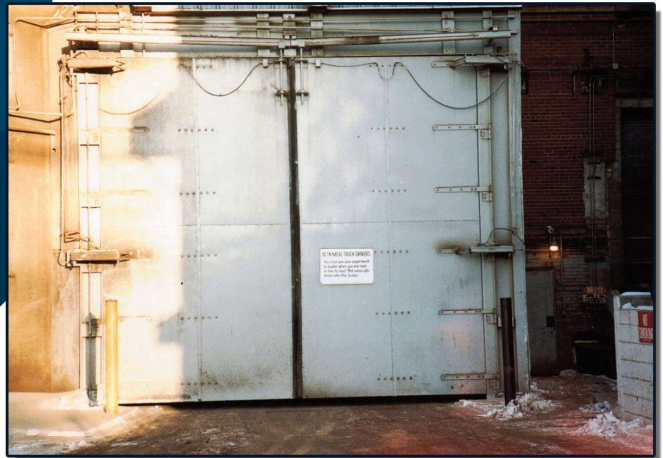

522 West 27th Street
Hibbing, MN 55746

Toll Free: (800) 346-5760
Phone: (218) 263-8366
Fax: (218) 262-6478

Email: mail@electricpowerdoor.com
www.electricpowerdoor.com

